

HYDRAULIC FILTER INDICATOR TEST UNIT

General description


- ❑ Designed to allow simple checking of filter indicator function.
- ❑ Inbuilt reservoir to collect leak off fluid from most differential indicators, thus allowing multiple tests to be carried out without topping up.
- ❑ Battery automatically tested when the jack plug is inserted into the socket.
- ❑ Adapters for the filter indicator are interchangeable and can be supplied for any make of filter.

Simple to use...

The filter indicator is screwed into the adapter and the adjuster is slowly screwed out to prime the unit.

The adjuster is then screwed in to increase the pressure, which is displayed on the pressure gauge.

When the indicator reaches its operating pressure the LED indicator changes colour from GREEN to RED.

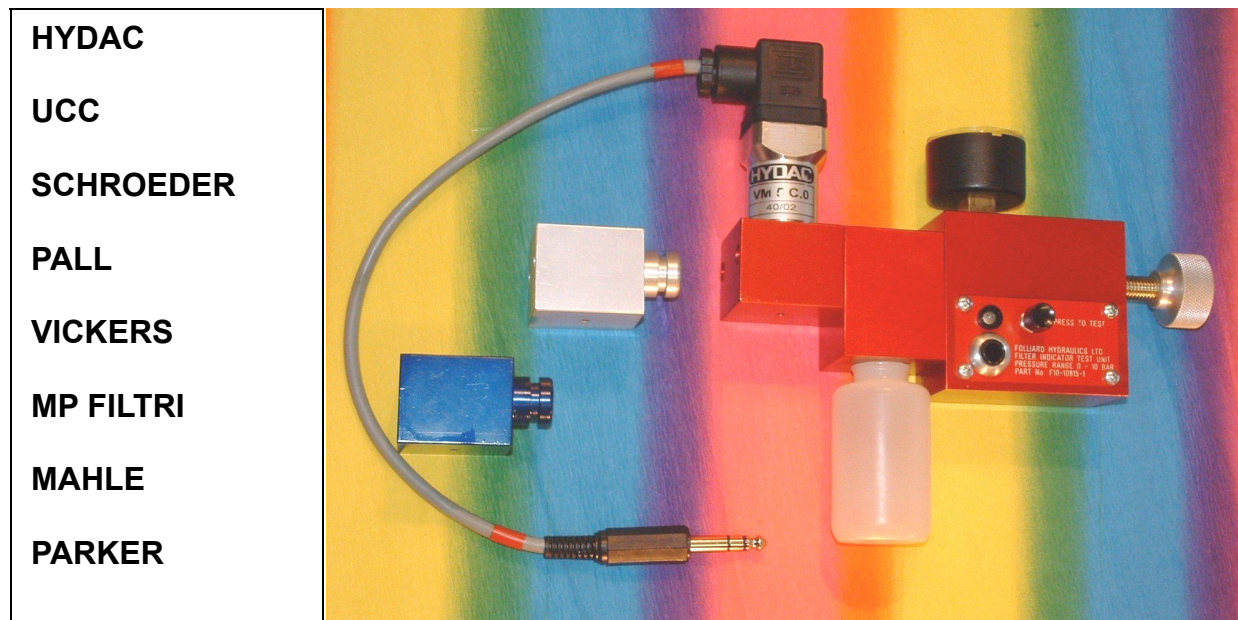

Technical Specification

Maximum pressure Bar	10 bar / 150 psi
Temperature limits	ambient
Hydraulic fluid	Mineral Oil, Water Glycol, Synthetic (with Viton reseal)
Viscosity range	5 cSt - 200 cSt
Weight	0.25 Kg
Electrical Data	
Contacts	normally open or normally closed
Battery	CR2032
Cable	To suit indicator